

NSG 3060A

THE MODULAR SOLUTION FOR 6 kV APPLICATIONS



- One box solution system
- Surge voltage up to 6.6 kV allows overtesting
- Easy to use 7" color touch screen
- IEC and ANSI coupling methods
- Parameters can be changed while test is running
- Wide range of optional test accessories
- High accuracy switching technology meets ANSI coupling requirements

Teseq's new NSG 3060A conducted immunity generator takes the proven, user-friendly design of the highly successful NSG 3000 series to a new level. This innovative design uses modular architecture to provide a versatile system that can be configured for basic testing needs and expanded to meet the needs of sophisticated test laboratories.

Designed to fulfill requirements for CE mark and ANSI C62.41 testing, the NSG 3060A performs tests for Combination wave surge, Ring wave and Electrical Fast Transient (EFT) pulses as well as Power Quality Testing (PQT). Extensive expansion capabilities enable the system to be configured for a much broader range of applications.

Using state of the art components, the self-contained modules set new standards with respect to switching and phase accuracy and exceed the existing standards' requirements. With its powerful processors, the NSG 3060A can completely fulfill the unique coupling requirements specified by ANSI C62.41. This standard requires that the pulse amplitude be adjusted for the phase position of the pulse on the AC mains, and for the amplitude of the mains voltage.

A 7" touch panel display with superb contrast and color is the most striking feature of the new NSG 3060A. For fast and efficient data entry, input devices include an integrated keyboard and a thumbwheel with additional keys for sensitivity adjustment.

The user-friendly graphic display speeds test setup. Each parameter's value is highly visible, and all settings can be quickly selected and modified with the generously sized touch input buttons. A stylus is not necessary, and ramp functions are programmed quickly and easily. Multi-step test procedures can be created and their sequence or parameter values changed easily.

The users can make manual parameter changes using the thumbwheel while a test is under way, providing an effective and fast method for identifying critical threshold values. The Test Assistance (TA) function allows users to initiate standardized test with just a few "clicks" to achieve quick, reliable results in a development environment.

The NSG 3060A has an Ethernet port for external PC control. The Windows-based control software simplifies test programming and allows compilation of complex test sequences with diverse pulse types. Test reports can be generated during the test operation, allowing the operator to enter observations as the test progresses and increasing the efficiency of long-term tests.

NSG 3060A

THE MODULAR SOLUTION FOR 6 KV APPLICATIONS

Model	EFT/Burst	Surge	PQT	Ring wave	Telecom-Surge
NSG 3060A-IEC					
NSG 3060A-ANSI					
NSG 3060A-FULL					

The NSG 3060A performs tests according to the following specifications:

Combination wave pulse 1, 2/50 - 8/20 μ s (Hybrid-Surge pulse)

Pulse conforms to IEC/EN 61000-4-5 and ANSI (IEEE) 62.41

Parameter	Value
Pulse voltage (open circuit):	± 200 V to 6.6 kV (in 1 V steps)
Pulse current (short circuit):	± 100 A to 3.3 kA
Impedance:	2/12 Ω
Polarity:	positive / negative / alternate
Pulse repetition:	10 s* up to 9'999 s (in 1 s steps)
Test duration:	1 to 99'999 pulses, continuous
Phase synchronization:	asynchronous, synchronous 0 to 359° (in 1° steps)
Coupling:	ANSI / IEC / external

* Repetition rate depends on voltage:

200 to 4400 V = 10 s repetition time

4401 to 6600 V = 20 s repetition time

Ring wave 0.5 μ s/100 kHz

Pulse conforms to IEC/EN 61000-4-12 and ANSI (IEEE) C62.41

Parameter	Value
Pulse voltage (open circuit):	± 200 V to 6.6 kV (in 1 V steps)
Pulse current (short circuit):	± 16.6 to ± 550 A, $\pm 10\%$ ± 6.6 to ± 220 A, $\pm 10\%$ ± 1 to ± 33 A, $\pm 10\%$
Impedance:	12/30 Ω
Polarity:	positive / negative / alternate
Pulse repetition:	10 s* up to 9'999 s (in 1 s steps)
Test duration:	1 to 99'999 pulses, continuous
Phase synchronization:	asynchronous, synchronous 0 to 359° (in 1° steps)
Coupling:	ANSI / IEC / external

* Repetition rate depends on voltage:

200 to 4400 V = 10 s repetition time

4401 to 6600 V = 20 s repetition time

NSG 3060A

THE MODULAR SOLUTION FOR 6 KV APPLICATIONS

Burst (EFT) 5/50 ns

Pulse conforms to IEC/EN 61000-4-4

Parameter	Value
Pulse amplitude:	±200 V to 4.8 kV (in 1 V steps) - open circuit ±100 V to 2.4 kV (50 Ω matching system)
Burst frequency:	100 Hz to 1000 kHz
Polarity:	positive / negative / alternate
Repetition time:	10 ms to 9'999 ms
Burst time:	0.01 ms to 9'999 ms, single pulse
Test duration:	1 s to 9'999s, 1 min to 1600 min, endless
Phase synchronization:	asynchronous, synchronous 0 to 359° (in 1° steps)
Coupling:	internal / external

Dips & Interrupts

conforms to IEC / EN 61000-4-11, IEC / EN 61000-4-29

Parameter	Value
Dips & Interrupts:	From EUT voltage input to 0 V, 0% ⁽¹⁾
Uvar with optional variac:	depending on model (VAR 3005A)
Uvar with step transformer:	0, 40, 70, 80% (INA 650xA)
Peak inrush current capability:	> 500 A (at 230 V)
Switching times:	1 to 5 µs (100 Ω load)
Event time (T-Event):	20 µs to 9999 s, 0.5 to 9'999 cycles
Repetition time:	10 ms to 9'999 ms, 1 to 9'999 s
Test duration:	1 to 99'999 events, endless
Phase synchronization:	asynchronous, synchronous 0 to 359° (in 1° steps)

(1) In combination with VAR 3005A-S16, effective minimal dip voltage ~8 V. As specified in IEC 61000-4-11, chapter. 5.1 a test voltage level from 0% to 20% of the rated voltage is considered as a total interruption.

NSG 3060A

THE MODULAR SOLUTION FOR 6 KV APPLICATIONS

Variation test (with VAR 3005A-S16 only)

Parameter	Value
Uvar with optional variac:	up to 265 V (in 1 V steps) or up to 115% U _{in} (in 1% steps)
Decreasing time T _d :	1 ms to 9.999 ms, 0.5 to 9999 cycles, abrupt
Time at reduced voltage T _s :	1 ms to 9.999 ms, 0.5 to 9999 cycles,
Increasing time T _i :	1 ms to 9.999 ms, 0.5 to 9999 cycles,
Repetition time:	1 s to 9'999 s
Events:	1 to 99'999

Pulsed magnetic field in conjunction with MFC 30

conforms to IEC/EN 61000-4-9

Parameter	Value
Field:	100 to 1200 A/m
Polarity:	positive / negative / alternate
Repetition time:	10 s to 9999s (in 1 s steps)
Impedance:	2 Ω
Coil / impedance factor:	0.01 to 100.00
Test duration:	1 to 9'999 pulses, endless
Phase synchronization:	asynchronous, synchronous 0 to 359° (in 1° steps)

Power magnetic field in conjunction with MFT 30 or MFO 6501A and MFC 30 / MFC 300

conform to IEC/EN 61000-4-8

Parameter	Value
Field:	1 to max. 40 A/m (in 1 A/m steps)
Frequency:	50/60 Hz
Coil factor:	0.01 to 99.99
Test duration:	1 to 9'999 pulses, continuous

NSG 3060A

THE MODULAR SOLUTION FOR 6 KV APPLICATIONS

Internal coupling network

Parameter	Value
EUT supply:	1-phase
EUT VAC:	Up to 300 Vrms *, 50 / 60 Hz (phase - neutral)
EUT VDC:	Up to 300 VDC
EUT current	1 x 16 Arms continuous (over heat protected)
Connections: Front panel:	- EUT: 4mm banana plug - Burst OUT 50 Ω SHV - Trigger out BNC
Rear panel	- EUT supply: banana plug 4 mm - Additional ground connector - Instrument supply 85 V to 264 VAC - Connector surge HV – COM
Surge	Standard coupling as per IEC 61000-4-5
Coupling mode	Line to Line Line(s) to ground
Mains decoupling:	1.5 mH 0% + 35%
Decoupling attenuation:	Residual pulse voltage on EUT power supply inputs 15 % max. Residual voltage on non-pulsed EUT power supply inputs 15 % max.
EFT (Burst)	Standard coupling all lines to ref ground (GND) IEC / EN 61000-4-4 L, N, PE to ref GND
	Any lines and combinatio to ref GND: L to ref GND N to ref GND PE to ref GND L, N to ref GND L, PE to ref GND N, PE to ref GND
PQT:	Dips & interrupts to phase L

NSG 3060A

THE MODULAR SOLUTION FOR 6 KV APPLICATIONS

Technical specification

Instrument supply	85 to 265 VAC, 50 / 60 Hz
Dimensions NSG 3060A-IEC	19"; 6 HU, 448 x 289 x 500 mm (W x H x D)
Weight NSG 3060A	30 kg (66 lbs)

Options

CDN 3063A-C32	Three phase 480 V / 32 A automatic coupling decoupling networks for Burst/EFT up to 4.8 kV, Surge, Ring Wave pulses up to 6,6 kV
CDN 3063A-C63	Three phase 480 V / 63 A automatic coupling decoupling network for Burst/EFT up to 4.8 kV, Surge, Ring Wave pulses up to 6,6 kV
CDN 3063A-C100	Three phase 480 V / 100 A automatic coupling decoupling network for Burst/EFT up to 4.8 kV, Surge, Ring Wave pulses up to 6,6 kV
CDN 3425	Burst EFT capacitive coupling clamp for data line coupling per IEC 61000-4-4
CDN 117A-C6-4-1	Coupling networks for unsymmetrical signal-/data lines (surge)
CDN 118A-C6-4-1	Coupling networks for symmetrical signal-/data lines (surge)
CDN HSS-2	Coupling network for 2 kV surge pulse 1.2 / 50 μ s IEC/EN 61000-4-5 on unshielded symmetrical high speed telecom lines (Ethernet)
PVF BKIT 1	Burst/EFT verification set
MD 210	Voltage differential probe 7 kV common / differential 1000:1 / 100:1
MD 300	Current probe 5 kA

Accessories for IEC/EN 61000-4-11

TVT 1-250-16	Manual step transformer, 16 AAC, 0/40/70/80%
VAR 3005A-S16	Automatic single variable transformer, 1 x 16 A

Accessories for IEC/EN 61000-4-8/-4-9

MFO 6501A	Manual magnetic field option -4-8
MFC 30	Magnetic field coil 1 x 1 m, with MFO max. 40 A/m -4-8; Surge* max. 1200 A/m -4-9
MFC 300	Magnetic field coil 1 x 1 m; max. 330 A/m -4-8

AMETEK CTS GmbH
Sternenhofstrasse 15 4153 Reinach Switzerland

© November 2018 AMETEK CTS
Specifications subject to change without notice. This product is designed and manufactured under the strict quality and environmental requirements of the ISO 9001. This document has been carefully checked. However, AMETEK CTS does not assume any liability for errors or inaccuracies.

691-388 A December 2018

日图简介

深圳市日图科技有限公司（简称“日图科技”）创始于2004年，核心业务是为国内企业提供测试设备及相关器材的供应服务，公司客户涵盖制造、科研、教育、电力、能源、通信等众多领域。创业至今，日图科技已经成为国内仪器仪表行业中最大的综合服务供应商之一，日图科技作为行内的领先者，有着高效的供应服务体系，并拥有一支专业的、高素质的服务团队。

目前，日图科技已在深圳、上海、广州、苏州、重庆、杭州、西安、香港等国内电子工业发达地区设立了办事与服务机构，并通过日图科技在全国各地的经销网络，为广大客户提供优质的本地化服务。


日图科技一贯秉承“专业、规范、诚信立业，日日图新”的宗旨，并在实践中不断提升公司的服务能力，为客户提供专业、高效、全面、经济的优质供应服务，顾客满意是日图科技永远追求的目标。

合作伙伴



优势服务

- (1) 产品选型
- (2) 测试解决方案
- (3) 免费测试服务
- (4) 代办计量校准
- (5) 维修维护
- (6) 技术培训
- (7) 物流配送
- (8) 常备应急库存

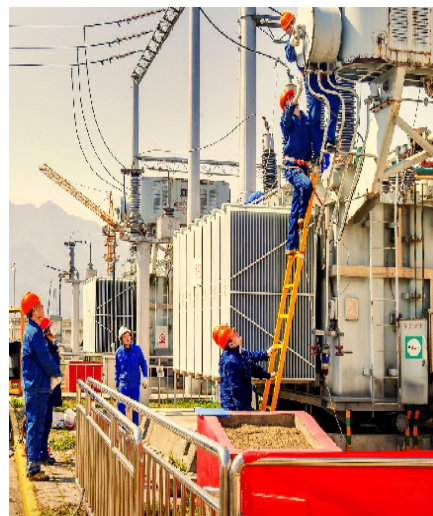



日图抖音号



日图公众号

深圳总部

深圳市南山区留仙大道南山云谷创新产业园二期 6 栋一楼东座
电话：0755-83680722(8 线)

上海分公司

上海市闵行区中春路 8633 弄万科七宝国际 26 幢 701 室
电话：021-33888891/3/5
手机：13564654980

广州分公司

广州市科学城科学大道中 97 号科汇金谷 J 栋东座 808 室
电话：020-31604020
手机：18027340836

西安分公司

陕西省西安市雁塔区长安中路南飞鸿广场 3 号楼 1813 室
手机：15529365365

杭州分公司

浙江省杭州市萧山区盈丰街道鸿宁路 1819 号左右世界 1 幢 1 单元 702-3
电话：0571-86856181
手机：18668225058

重庆分公司

重庆市观音桥茂业东方时代大厦 35 楼 3509 室
电话：023-67904187
手机：13896060852

苏州分公司

苏州苏州工业园区科营路 2 号中新生态大厦 10 楼 1010 室
电话：0512-62515781、0512-62515784
手机：15895400640

香港分公司

香港新界元朗屏厦厦村厦村路 DD125 段 1215-1217lot
电话：+852-24932683

深圳市日图科技有限公司

SHENZHEN RITU SCIENCE TECHNOLOGY CO.,LTD

www.rituchina.com

400-616-5217

广东省深圳市南山区留仙大道南山云谷创新产业园二期 6 栋一楼东座

① 如需所有最新配套资料，请立即与日图科技各地分公司联系。